



SKYTEC Mini LCD EV Charger




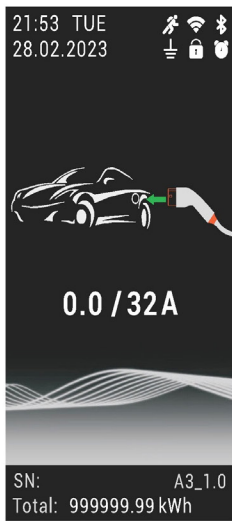


Charging Standby

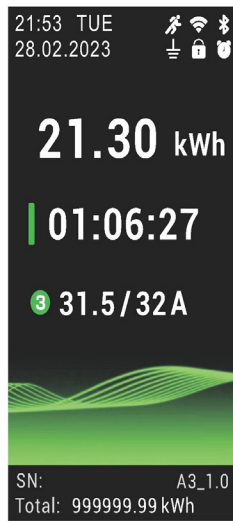

During Charging

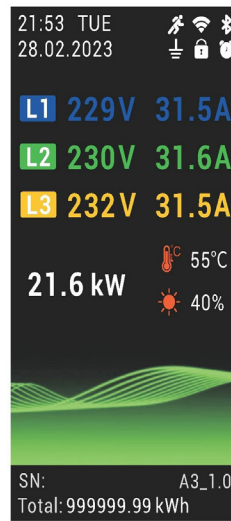

During Charging

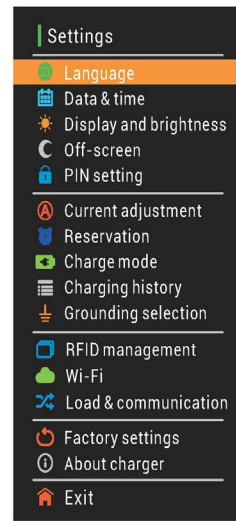

Settings

- Date and Time, Charging, Consumption (kWh)
- Charging voltage / current / power, Total electricity (kWh), Temperature
- Multinational language selection
- Current adjustable from 6A to 32A in steps of 1A
- Appointment for charging (based on week and time)
- Screen automatically turns off/on (based on human movement)
- Automatic adjustment of screen brightness (based on ambient brightness)
- APP remote control (Bluetooth and WiFi)
- Charging mode (RFID/APP/Password/Plug and Play)
- Charging history (up to 30 records)
- Load control, adjustable phase number and current (ModBus TCP)

| | | |
|----------------------------------|------------------------------------|---------|
| Model | EVE07W | EVE22W |
| Phase | 1-Phase | 3-Phase |
| Electrical Specifications | | |
| Input / Output voltage | AC240V | AV400V |
| Input frequency | 50 / 60 Hz | |
| Max. output power | 7kW | 22kW |
| Max. output current | 32A | 32A |
| Standard | IEC61851 / GB/T18487 | |
| Certificate | CE, RoHS | |
| Protection | | |
| Over voltage protection | Yes | |
| Under voltage protection | Yes | |
| Over load protection | Yes | |
| Short circuit protection | Yes | |
| Leakage protection | Yes | |
| Over-temp protection | Yes | |
| Lightning protection | Yes | |
| Function and Accessory | | |
| LED indicators | Yes | |
| LCD screen | 3.0 inch | |
| RCD | Type B (AC 30mA + DC 6mA) | |
| Current adjustment | Yes | |
| WiFi / Bluetooth | Yes (WiFi 2.4GHz) | |
| Emergency stop button | Yes | |
| Relay adhesion detection | Yes | |
| RFID manageable | Yes | |
| Working environment | | |
| Protection degree | IP 65 | |
| Operation temperature | -30°C ~ 60°C | |
| Relative humidity | ≤95%RH | |
| Operating elevation limit | ≤2000m | |
| Cooling | Natural air cooling | |
| Standby power consumption | < 5W | |
| Mechanical parameters | | |
| Charging cable | 5m (Standard configuration) | |
| Control Box | H*W*D = 180mm*180mm*70mm | |
| Weight | ≤6kg | |
| Color | Black / White | |
| Material | PC (Flame retardant, UV resistant) | |

Everything about profitability and charging experience

Industry Leader in EV Charging Load Management Solutions & Mass-Market EV Charging Solutions

Skytec EV Power Pty Ltd

ACN 673 363 196

Email: info@skytecone.com

Unit 2301, 23/F, 212 Margaret Street, Brisbane City, Queensland 4000, Australia